


Probe mm.[inch]

STRUCTURE-FEATURE


ELECTRICAL		MECHANICAL & ENVIRONMENTAL	
Voltage Rating	250V Max	Installation Hole Size	6.0[.236]
Frequency Range	DC to 6GHz	Max Stroke	2.9[.114]
Impedance	50 Ohm	Durability	10000 cycles
Insulation	5000 MOhm. min.	Temperature	-55 ~ +165 °C
V.S.W.R	1.3max(DC ~ 6GHz)		
Withstanding Voltage	500V+/-20V		

APPLICATION



RF PROBE ORDER

FTOP-1029CF-6G

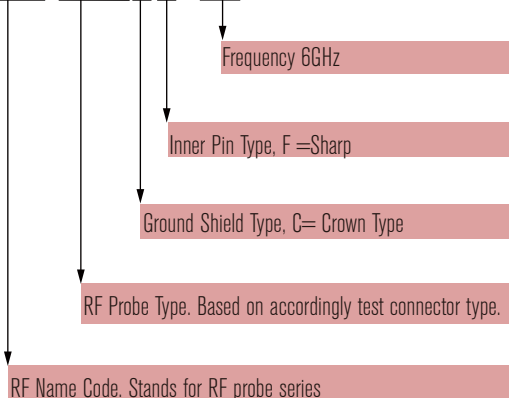

1. SMA female will be preferred design if no required.
2. Different type connectors can be designed.
3. Please contact us for customized issue.